


Model EYE-ON DVR			AHD (2.0 / 1080P)		
			AHD Prestige04	AHD Prestige08	AHD Prestige16
			Mini case		Mini Wide case
Video	Camera input		4 BNC	8 BNC	16 BNC
	Individual HD/Analog selectable		AHD (2.0 / 1080P) + 960H Hybrid		
	Available source		AHD 720p25,30/1080p25,30 /Composite/960H/Mixed		
	Output		1 HDMI (Main Display) 1 VGA (Main Display)		
Audio	Audio input		4 RCA	8 RCA	16 (8 RCA + 8 DB15)
	Output		1 RCA		
Sensor In			4 (NC, NO selectable)		
Alarm out			1 relay		
Operating System			Embedded Linux OS		
Display	Speed		Real Time		
	Resolution (Pixel)		1280X1024, 1280X720, 1920X1080		
	Split screen		1,4	1,4,6,8,9	1,4,6,8,9,13,16
Main Recording	CODEC		H.264		
	Resolution (Pixel)		1080p (1080p25,30) 720p (720p25,30) 960H, D1 (Composite, 960H)		
	Picture quality		4 steps (Super, High, Medium, Low)		
	Speed	NTSC area PAL area	120fps@720p/60fps@1080p 100fps@720p/50fps@1080p	240fps@720p/120fps@1080p 200fps@720p/100fps@1080p	480fps@720p/240fps@1080p 400fps@720p/200fps@1080p
Dual Recording	CODEC		H.264		
	Condition		Main Recording is 1080p, 720p		
	Resolution (Pixel)		None	480x256	480x256
Playback	Display		1,4	1,4,6,8,9	1,4,6,8,9,13,16
	Search mode		Calendar, Event ,POS , Panorama, Thumbnail		
	Speed	NTSC area PAL area	30fps@1080p 25fps@1080p	30fps@1080p 25fps@1080p	60fps@1080p 50fps@1080p
	Fast/Slow speed		Normal, REW & FF [recorded speed x2, x4, x8, x16,x32,x64,x1/2,x1/4], Frame to frame, Pause		
Network (Individual setting of resolution, frame rates and picture quality)	Network Interface		Megabit Ethernet		Gigabit Ethernet
	High Resolution (Pixel)		Record Steaming		
	Low Resolution (Pixel)		480x256 (1080p25,30) 480x256 (720p25,30) CIF (Composite, 960H)		
	Speed	NTSC area PAL area	50fps (480x256)	240fps (480x256)	240fps (480x256)
	Protocol		TCP/IP, HTTP, DHCP		
	Application		Windows 7 / 8 (PC Client system& IE)/MAC		
	Web Browser		Internet Explorer, Safari, Chrome, Firefox		
	Smart phone App		Android, iPhone for live and search		

Backup	Interface	USB 2.0 X 2	
	Backup device	External HDD, CD&DVD-RW, Network, Thumb Drive	
The number of HDD		1 SATA(No capacity limit ; 6TB of more)	2 SATA(No capacity limit ; 6TB of more)
Function		•Full GUI with alpha blending	
		•Individual setting of resolution, frame rates and picture quality	
		•Instant Replay	
		•Digital Zoom	
		•Mouse Control	
		•Weekly scheduler with holiday by 10 minutes setting	
		•Covert, Disable and Private function of cameras	
		•Motion Detection with 576 area setting	
		•Relay alarm output	
		•PTZ control by RS-485	
		•Daylight Saving Time and Network Time Setting	
		•Multi User Authority up to 8 Users	
		•Deinterlacer upon live and playback	
		•22 languages with full graphic	
		•Individual Network port setting	
		•Auto Deletion	
		•Import and Export the configuration	
		•Interactive setup via network	
		•POS Interface	
		•Dual CODEC engine for independent video transmission	
Others	Power Consumption	24W	60W
	Operating Temperature	5 ~40°C(41~104F)	
	Relative Humidity	Maximum 80% non-condensing	
	Dimension	300(W)×210(D)×48(H) mm	380(W)×340(D)×50(H) mm

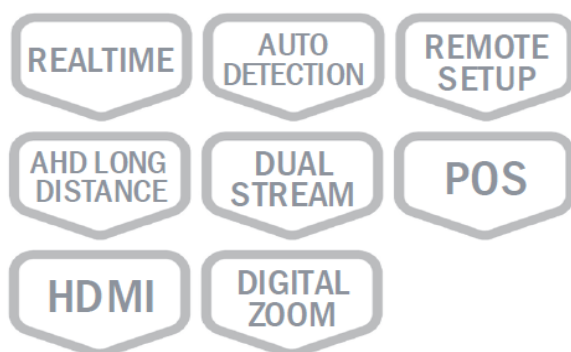

Features

- 1080P Full HD Realtime Live
- 1080P Half Realtime Recording
- Auto detection AHD & 960H
- Long distance up to 300m (AHD)
- Individual channel setting
- User friendly OSD GUI
- Powerful CMS with Remote setup
- EYEON Mobile APP (For iPhone, Android)
- Storage – 1 SATA (Mini : 04/08ch), 2 SATA (Mini Wide: 16ch)

* Mini Wide Type for 16ch.



Dimensions (Unit:mm)

